

HOSTAFORM® C 52021 | POM | Unfilled

Description

Chemical abbreviation according to ISO 1043-1: POM
Molding compound ISO 9988- POM-K, M-GNR, 06-002

POM copolymer

Extremely easy flowing Injection molding type for very thin-walled precision molded parts with unfavourable flow-path-wallthickness relation; permits processing at reduced temperature and also shorter cycle times; for mechanical lower requirements; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation.

Fulfills EG-directive 2002/72/EU as well as the recommendation XXXIII for consumer goods of the BgVV,
FDA compliant according to 21 CFR 177.2470

UL-registration in natural a thickness more than 0.81 mm, in black a thickness more than 1.5 mm as UL 94 HB, temperature index UL 746 B for a thickness of 1.5 mm, electrical 105 °C, mechanical 90 °C

Burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm.

Ranges of applications: For very thin-walled precision molded parts with unfavourable flow-path-wallthickness relation; permits processing at reduced temperature and also shorter cycle times.

FDA = Food and Drug Administration (USA)
BgVV = Bundesinstitut für gesundheitlichen Verbraucherschutz und Veterinärmedizin
FMVSS = Federal Motor Vehicle Safety Standard (USA)
UL = Underwriters Laboratories (USA)

| Physical properties | Value | Unit | Test Standard |
|-----------------------------|-------------|------------------------|---------------|
| Density | 1410 | kg/m ³ | ISO 1183 |
| Melt volume rate (MVR) | 39 | cm ³ /10min | ISO 1133 |
| MVR test temperature | 190 | °C | ISO 1133 |
| MVR test load | 2.16 | kg | ISO 1133 |
| Mold shrinkage - parallel | 1.9 | % | ISO 294-4 |
| Mold shrinkage - normal | 1.8 | % | ISO 294-4 |
| Water absorption (23°C-sat) | 0.65 | % | ISO 62 |

| Mechanical properties | Value | Unit | Test Standard |
|------------------------------------|-------------|-------------------|---------------|
| Tensile modulus (1mm/min) | 3000 | MPa | ISO 527-2/1A |
| Tensile stress at yield (50mm/min) | 65 | MPa | ISO 527-2/1A |
| Tensile strain at yield (50mm/min) | 7 | % | ISO 527-2/1A |
| Nominal strain at break (50mm/min) | 15 | % | ISO 527-2/1A |
| Tensile creep modulus (1h) | 2500 | MPa | ISO 899-1 |
| Tensile creep modulus (1000h) | 1300 | MPa | ISO 899-1 |
| Flexural modulus (23°C) | 2800 | MPa | ISO 178 |
| Charpy impact strength @ 23°C | 100 | kJ/m ² | ISO 179/1eU |

HOSTAFORM® C 52021 | POM | Unfilled

| Mechanical properties | Value | Unit | Test Standard |
|--|------------|-------------------|---------------|
| Charpy impact strength @ -30°C | 100 | kJ/m ² | ISO 179/1eU |
| Charpy notched impact strength @ 23°C | 5.0 | kJ/m ² | ISO 179/1eA |
| Charpy notched impact strength @ -30°C | 5 | kJ/m ² | ISO 179/1eA |

| Thermal properties | Value | Unit | Test Standard |
|---|-------------|--------|-------------------|
| Melting temperature (10°C/min) | 166 | °C | ISO 11357-1,-2,-3 |
| DTUL @ 1.8 MPa | 106 | °C | ISO 75-1/-2 |
| Coeff.of linear therm. expansion (parallel) | 1.1 | E-4/°C | ISO 11359-2 |
| Flammability @1.6mm nom. thickn. | HB | class | UL94 |
| thickness tested (1.6) | 1.5 | mm | UL94 |
| UL recognition (1.6) | UL | - | UL94 |
| Flammability at thickness h | HB | class | UL94 |
| thickness tested (h) | 0.81 | mm | UL94 |
| UL recognition (h) | UL | - | UL94 |


| Electrical properties | Value | Unit | Test Standard |
|--------------------------------|-------------|-------|---------------|
| Relative permittivity - 100 Hz | 4 | - | IEC 60250 |
| Relative permittivity - 1 MHz | 4 | - | IEC 60250 |
| Dissipation factor - 100 Hz | 30 | E-4 | IEC 60250 |
| Dissipation factor - 1 MHz | 50 | E-4 | IEC 60250 |
| Volume resistivity | 1E12 | Ohm*m | IEC 60093 |
| Surface resistivity | 1E14 | Ohm | IEC 60093 |
| Electric strength | 35 | kV/mm | IEC 60243-1 |
| Comparative tracking index CTI | 600 | - | IEC 60112 |

| Test specimen production | Value | Unit | Test Standard |
|--------------------------------|-------------|------|---------------|
| Processing conditions acc. ISO | 9988 | - | Internal |


| Rheological Calculation properties | Value | Unit | Test Standard |
|------------------------------------|-------------|-------------------|---------------|
| Density of melt | 1200 | kg/m ³ | Internal |
| Thermal conductivity of melt | 0.19 | W/(m K) | Internal |
| Specific heat capacity of melt | 2060 | J/(kg K) | Internal |
| Ejection temperature | 163 | °C | Internal |

HOSTAFORM® C 52021 | POM | Unfilled


Dynamic Shear modulus-temperature

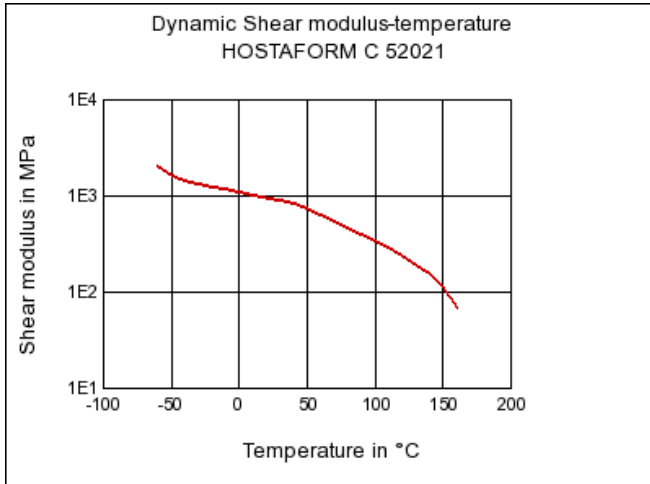

Stress-strain

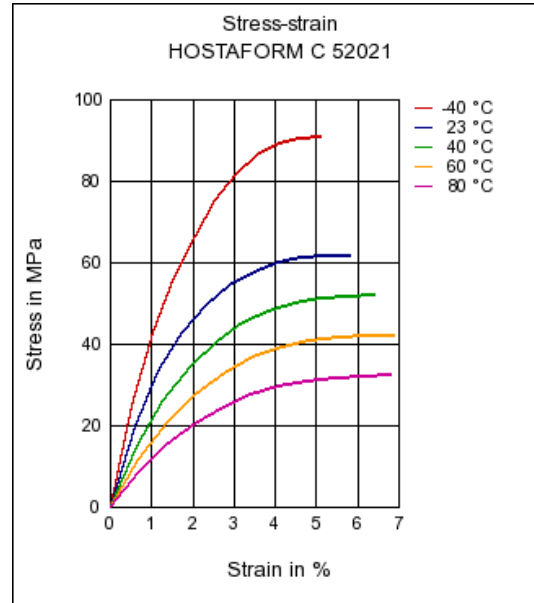


Secant modulus-strain

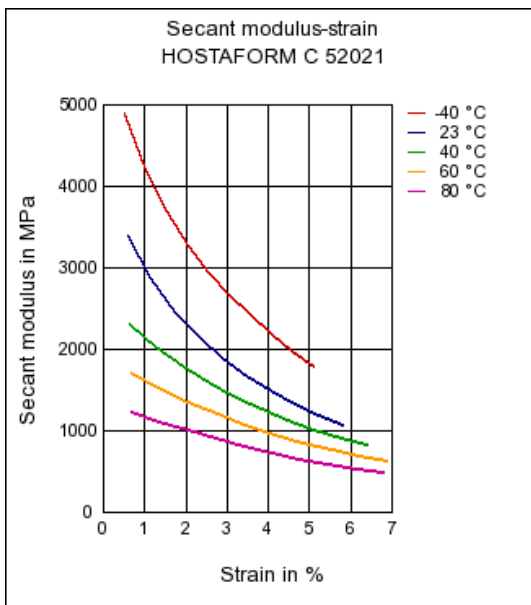

HOSTAFORM® C 52021 | POM | Unfilled

Typical injection moulding processing conditions

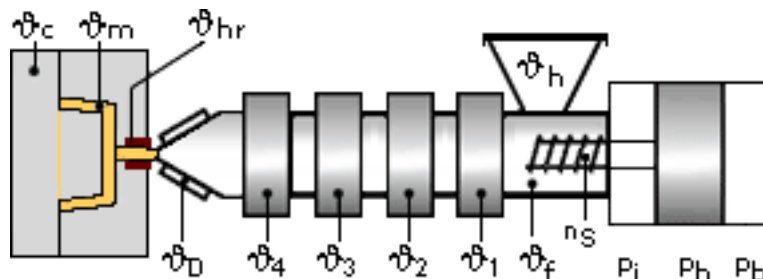

Pre Drying:

Necessary low maximum residual moisture content: 0.15%

Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.

The product can then be stored in standard conditions until processed.

Drying time: 3 - 4 h

Drying temperature: 120 - 140 °C

Temperature:

| | ϕManifold | ϕMold | ϕMelt | ϕNozzle | ϕZone4 | ϕZone3 | ϕZone2 | ϕZone1 | ϕFeed | ϕHopper |
|----------|-----------|-------|-------|---------|--------|--------|--------|--------|-------|---------|
| min (°C) | 190 | 80 | 190 | 190 | 190 | 190 | 180 | 170 | 60 | 20 |
| max (°C) | 210 | 120 | 210 | 210 | 210 | 200 | 190 | 180 | 80 | 30 |

Pressure:

| | Inj press | Hold press | Back pressure |
|-----------|-----------|------------|---------------|
| min (bar) | 600 | 600 | 0 |
| max (bar) | 1200 | 1200 | 40 |

Speed:

Injection speed: slow-medium

Screw speed

| | 16 | 25 | 40 | 55 | 75 |
|---------------------|----|-----|-----|----|----|
| Screw diameter (mm) | 16 | 25 | 40 | 55 | 75 |
| Screw speed (RPM) | - | 150 | 100 | 70 | - |

Injection Molding

Standard injection moulding machines with three phase (15 to 25 D) plastating screws will fit.

| | |
|-------------------|------------|
| Melt temperature | 190-230 °C |
| Mould temperature | 80-120 °C |

HOSTAFORM® C 52021 | POM | Unfilled

Contact Information

Americas

Ticona North American Headquarters
Product Information Service
8040 Dixie Highway
Florence, KY 41042
USA
Tel.: +1-800-833-4882
Tel.: +1-859-372-3244
email: prodinfo@ticona.com
Ticona on the web: www.ticona.com

Customer Service

Tel.: +1-800-526-4960
Tel.: +1-859-372-3214
Fax: +1-859-372-3125

Europe

Ticona GmbH
Information Service
Tel.: +49 (0) 180-5842662 (Germany)
+49 (0) 69-30516299 (Europe)
Fax: +49 (0) 180-2021202 (Germany & Europe)
email: infoservice@ticona.de
Internet: www.ticona.com

General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values.

Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use.

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication.

Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards.

We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed (+49 (0) 69 30516299 for Europe and +1 859-372-3244 for the Americas) for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

The products mentioned herein are not intended for use in medical or dental implants.

© Copyright 2007, Ticona, all rights reserved. (Pub. 26-September-2013)