

CELANEX® 4306 | PBT | Glass Reinforced

Description

Celanex 4306 is a 30% glass reinforced, toughened, low warpage thermoplastic polyester.

| Physical properties | Value | Unit | Test Standard |
|---------------------------|----------------|-------------------|---------------|
| Density | 1500 | kg/m ³ | ISO 1183 |
| Mold shrinkage - parallel | 0.4-0.6 | % | ISO 294-4 |


| Mechanical properties | Value | Unit | Test Standard |
|--|-------------|-------------------|---------------|
| Tensile modulus (1mm/min) | 9200 | MPa | ISO 527-2/1A |
| Tensile stress at break (5mm/min) | 120 | MPa | ISO 527-2/1A |
| Tensile strain at break (5mm/min) | 2.9 | % | ISO 527-2/1A |
| Flexural modulus (23°C) | 8500 | MPa | ISO 178 |
| Flexural strength (23°C) | 180 | MPa | ISO 178 |
| Charpy impact strength @ 23°C | 60 | kJ/m ² | ISO 179/1eU |
| Charpy impact strength @ -30°C | 45 | kJ/m ² | ISO 179/1eU |
| Charpy notched impact strength @ 23°C | 11.9 | kJ/m ² | ISO 179/1eA |
| Charpy notched impact strength @ -30°C | 11 | kJ/m ² | ISO 179/1eA |
| Notched impact strength (Izod) @ 23°C | 12.0 | kJ/m ² | ISO 180/1A |
| Rockwell hardness | 73 | M-Scale | ISO 2039-2 |

| Thermal properties | Value | Unit | Test Standard |
|---|-------------|--------|-------------------|
| Melting temperature (10°C/min) | 225 | °C | ISO 11357-1,-2,-3 |
| DTUL @ 1.8 MPa | 164 | °C | ISO 75-1/-2 |
| DTUL @ 0.45 MPa | 210 | °C | ISO 75-1/-2 |
| Coeff.of linear therm. expansion (parallel) | 0.2 | E-4/°C | ISO 11359-2 |
| Coeff.of linear therm. expansion (normal) | 0.87 | E-4/°C | ISO 11359-2 |

| Test specimen production | Value | Unit | Test Standard |
|---------------------------------------|---------------|------|---------------|
| Processing conditions acc. ISO | 7792-2 | - | Internal |
| Injection molding melt temperature | 260 | °C | ISO 294 |
| Injection molding mold temperature | 82 | °C | ISO 294 |
| Injection molding flow front velocity | 300 | mm/s | ISO 294 |
| Injection molding hold pressure | 48 | MPa | ISO 294 |

CELANEX® 4306 | PBT | Glass Reinforced

Typical injection moulding processing conditions

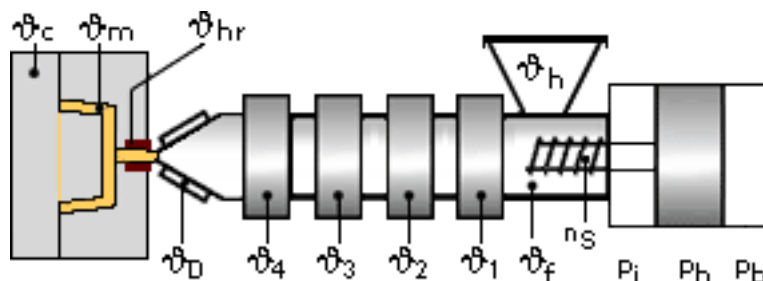

Pre Drying:

Necessary low maximum residual moisture content: 0.02%

To avoid hydrolytic degradation during processing, CELANEX resins have to be dried to a moisture level equal to or less than 0.02%. Drying should be done in a dehumidifying hopper dryer capable of dewpoints <-40°F (-40°C) at 250°F (121°C) for 4 hours.

For subsequent storage of the material in the dryer until processed (<= 60 h) it is necessary to lower the temperature to 100° C.

Drying time: 4 h

Drying temperature: 120 - 130 °C

Temperature:

| | ϕManifold | ϕMold | ϕMelt | ϕNozzle | ϕZone4 | ϕZone3 | ϕZone2 | ϕZone1 | ϕFeed | ϕHopper |
|----------|-----------|-------|-------|---------|--------|--------|--------|--------|-------|---------|
| min (°C) | 250 | 65 | 235 | 250 | 240 | 235 | 235 | 230 | 230 | 20 |
| max (°C) | 260 | 93 | 260 | 260 | 260 | 250 | 250 | 240 | 240 | 50 |

Speed:

Injection speed: medium-fast

Injection Molding

| | | |
|--------------------|------------------|---------------|
| Rear Temperature | 450-470(230-240) | deg F (deg C) |
| Center Temperature | 460-480(235-250) | deg F (deg C) |
| Front Temperature | 470-500(240-260) | deg F (deg C) |
| Nozzle Temperature | 480-500(250-260) | deg F (deg C) |
| Melt Temperature | 460-500(235-260) | deg F (deg C) |
| Mold Temperature | 150-200(65-93) | deg F (deg C) |
| Back Pressure | 0-50 | psi |
| Screw Speed | Medium | |
| Injection Speed | Fast | |

Injection speed, injection pressure and holding pressure have to be optimized to the individual article geometry. To avoid material degradation during processing low back pressure and minimum screw speed have to be used. Overheating of the material has to be avoided, in particular for flame retardant grades. Up to 25% clean and dry regrind may be used.

Contact Information

Americas

Europe

CELANEX® 4306 | PBT | Glass Reinforced

Ticona North American Headquarters
Product Information Service
8040 Dixie Highway
Florence, KY 41042
USA
Tel.: +1-800-833-4882
Tel.: +1-859-372-3244
email: prodinfo@ticona.com
Ticona on the web: www.ticona.com

Ticona GmbH
Information Service
Tel.: +49 (0) 180-5842662 (Germany)
+49 (0) 69-30516299 (Europe)
Fax: +49 (0) 180-2021202 (Germany & Europe)
email: infoservice@ticona.de
Internet: www.ticona.com

Customer Service
Tel.: +1-800-526-4960
Tel.: +1-859-372-3214
Fax: +1-859-372-3125

General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values.

Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use.

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication.

Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards.

We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed (+49 (0) 69 30516299 for Europe and +1 859-372-3244 for the Americas) for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

The products mentioned herein are not intended for use in medical or dental implants.

© Copyright 2007, Ticona, all rights reserved. (Pub. 26-September-2013)