

FORTRON® 0214 | PPS | Unfilled

Description

0214 is an unfilled grade exhibiting good melt strength. This grade demonstrates excellent heat and chemical resistance. It can be extruded to produce multi-filaments. Due to the excellent balance of flow and melt strength, this product is occasionally used for injection molding parts. Available standard in powder (0214B1), pellet (0214P1) and crystallized pellet (0214C1) form.

Physical properties	Value	Unit	Test Standard
Density	1350	kg/m ³	ISO 1183
Mold shrinkage - parallel	1.2 to 1.5	%	ISO 294-4
Mold shrinkage - normal	1.5 to 1.8	%	ISO 294-4
Water absorption (23°C-sat)	0.02	%	ISO 62

Mechanical properties	Value	Unit	Test Standard
Tensile modulus (1mm/min)	3800	MPa	ISO 527-2/1A
Tensile stress at break (5mm/min)	90	MPa	ISO 527-2/1A
Tensile strain at break (5mm/min)	3	%	ISO 527-2/1A
Flexural modulus (23°C)	3750	MPa	ISO 178
Flexural stress @ break	125	MPa	ISO 178
Unnotched impact str (Izod) @ 23°C	45	kJ/m ²	ISO 180/1U
Notched impact strength (Izod) @ 23°C	3.5	kJ/m ²	ISO 180/1A
Rockwell hardness	95	M-Scale	ISO 2039-2

Thermal properties	Value	Unit	Test Standard
Melting temperature (10°C/min)	280	°C	ISO 11357-1,-2,-3
Glass transition temperature (10°C/min)	90	°C	ISO 11357-1,-2,-3
DTUL @ 1.8 MPa	110	°C	ISO 75-1/-2
DTUL @ 8.0 MPa	95	°C	ISO 75-1/-2
Coeff.of linear therm. expansion (parallel)	0.52	E-4/°C	ISO 11359-2
Coeff.of linear therm. expansion (normal)	0.53	E-4/°C	ISO 11359-2


Electrical properties	Value	Unit	Test Standard
Relative permittivity - 10kHz	3.2	-	IEC 60250
Volume resistivity	1E9	Ohm*m	IEC 60093
Electric strength	18	kV/mm	IEC 60243-1
Comparative tracking index CTI	125	-	IEC 60112

Test specimen production	Value	Unit	Test Standard
Injection molding melt temperature	295 - 330	°C	ISO 294
Injection molding mold temperature	135 - 160	°C	ISO 294


Rheological Calculation properties	Value	Unit	Test Standard
Specific heat capacity of melt	1830	J/(kg K)	Internal

FORTRON® 0214 | PPS | Unfilled


Stress-strain (isochronous)

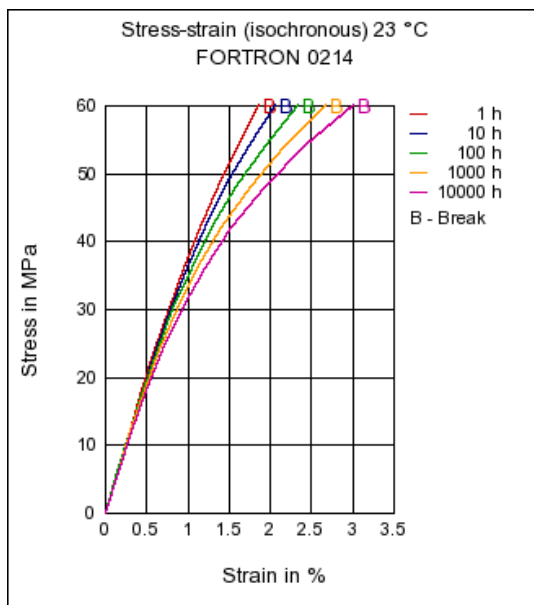

Creep modulus-time

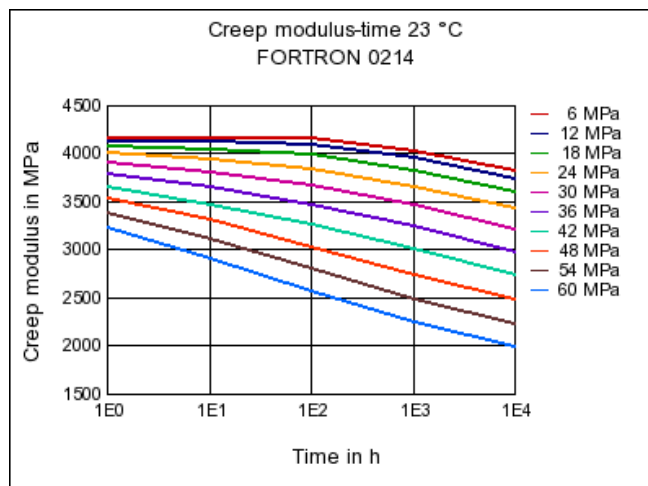

Typical injection moulding processing conditions

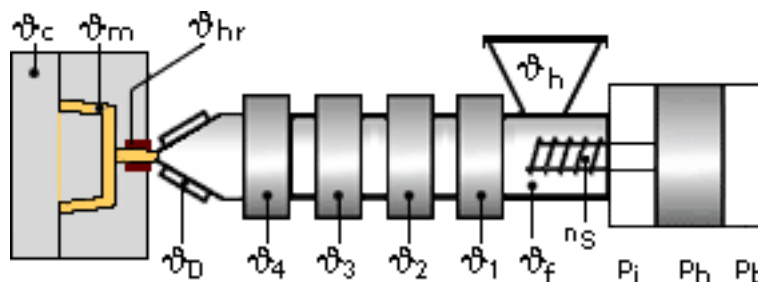

Pre Drying:

Necessary low maximum residual moisture content: 0.02%

FORTRON should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -30^\circ\text{C}$. The time between drying and processing should be as short as possible.

For subsequent storage the material should be stored dry in the dryer until processed ($\leq 60\text{ h}$).

Drying time: 3 - 4 h

Drying temperature: 110 - 120 °C

FORTRON® 0214 | PPS | Unfilled

Temperature:

	ϑ _{Manifold}	ϑ _{Mold}	ϑ _{Melt}	ϑ _{Nozzle}	ϑ _{Zone4}	ϑ _{Zone3}	ϑ _{Zone2}	ϑ _{Zone1}	ϑ _{Feed}	ϑ _{Hopper}
min (°C)	310	140	310	300	310	310	300	290	60	20
max (°C)	320	160	320	310	320	320	310	300	80	30

Pressure:

	Inj press	Hold press	Back pressure
min (bar)	400	300	0
max (bar)	800	600	30

Speed:

Injection speed: fast

Screw speed

Screw diameter (mm)	16	25	40	55	75
Screw speed (RPM)	-	120	75	50	-

Injection Molding

On injection molding machines with 15-25 D long three-section screws, are usual in the trade, the unreinforced FORTRON is processable. A shut-off nozzle is recommended.

Melt temperature 310-320 degC
Mold wall temperature at least 140 degC

A medium injection rate is normally preferred. All mold cavities must be effectively vented.

Contact Information

Americas

Ticona North American Headquarters
Product Information Service
8040 Dixie Highway
Florence, KY 41042
USA
Tel.: +1-800-833-4882
Tel.: +1-859-372-3244
email: prodinfo@ticona.com
Ticona on the web: www.ticona.com

Customer Service
Tel.: +1-800-526-4960
Tel.: +1-859-372-3214
Fax: +1-859-372-3125

Europe

Ticona GmbH
Information Service
Tel.: +49 (0) 180-5842662 (Germany)
+49 (0) 69-30516299 (Europe)
Fax: +49 (0) 180-2021202 (Germany & Europe)
email: infoservice@ticona.de
Internet: www.ticona.com

FORTRON® 0214 | PPS | Unfilled

General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values.

Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use.

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication.

Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards.

We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed (+49 (0) 69 30516299 for Europe and +1 859-372-3244 for the Americas) for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

The products mentioned herein are not intended for use in medical or dental implants.

© Copyright 2007, Ticona, all rights reserved. (Pub. 13-October-2011)